


MSSG Chwytyki uniwersalne



- Specyfikacje techniczne

PARAMETR			MSSG	MSSG	MSSG	MSSG	MSSG
			1100H	1500H	2200H	3000H	4000H
Waga urządzenia		kg	460	900	1370	2100	2500
Objętość		litry	150	300	512	800	900
wymiary	A	mm	1004	1053	1214	1502	1502
	B	mm	1579	1718	1984	2038	2038
	C	mm	1105	1204	1476	1873	1873
	D	mm	979	1034	1302	1723	1723
	E	mm	477	850	1050	1115	1370
Siła na krawędziach szczęk		KN	14	40	51	60	60
Hydraulika cykindra	P max	bar	300	350	350	350	350
	Q max	l/min	40	80	100	85	85
Hydraulika obrotu	P opt	bar	140	140	140	170	170
	Q opt	l/min	18	40	40	40	40
Waga koparki		ton	3,5 - 6,5	6,5 - 18	18 - 25	28 - 35	36 - 42

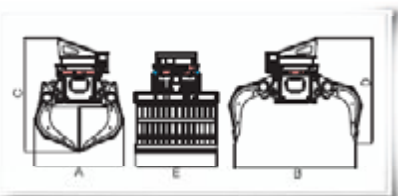

MSSG Chwytyki mechaniczne



- Specyfikacje techniczne

Parametr	Jednostka	MSDG					
		1000H	1500H	2000H	3000H	4000H	
Waga urządzenia	kg	700	1200	1590	2200	2590	
Wymiary	A	mm	2176	2254	2720	2986	3262
	B	mm	586	762	762	813	864
	C	mm	876	1118	1118	1220	1322
Waga koparki	ton	11 - 16	16 - 21	21 - 29	29 - 40	40 - 50	

